

Features

Meets requirements for efficiency rebates

Glowing ceramic ember base and logset

ILLUME / PROUDLY HANDCRAFTED IN NORTH AMERICA

ILLUME
CONTEMPORARY

EFFICIENTLY ELEGANT

ILLUME INSERTS
CONTEMPORARY

30FID
34FID

CO-LINEAR
INSERT

Standard

Contemporary burner

Multi-function remote control

Black porcelain liner

Halogen uplighting

Remote Hi-Lo flame

Battery backup

Micro mesh screen

Options

Propane conversion kit

Remote controlled fans

Square, oversized or 4 sided surround†

Speckled stones, driftwood, glass media†

WiFi phone app control

QUICK DIMENSIONS

	30FID		34FID	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	29½	N/A	33½	N/A
B.WIDTH	19¾	N/A	23¾	N/A
HEIGHT	20	N/A	23¾	N/A
DEPTH	13½	N/A	14½	N/A
VIEWING	24¼ x 14½		28¾ x 18¾	

†Required to complete install

BTU LISTING

30FIDNIL-01 / 24,000
30FIDLIL-01 / 23,000

34FIDNIL-01 / 31,000
34FIDLIL-01 / 30,000

EFFICIENCY (P4)


30FIDNIL-01 / 77.6%
30FIDLIL-01 / 79%

34FIDNIL-01 / 77.4%
34FIDLIL-01 / 78.5%





ILLUME DIMENSIONS

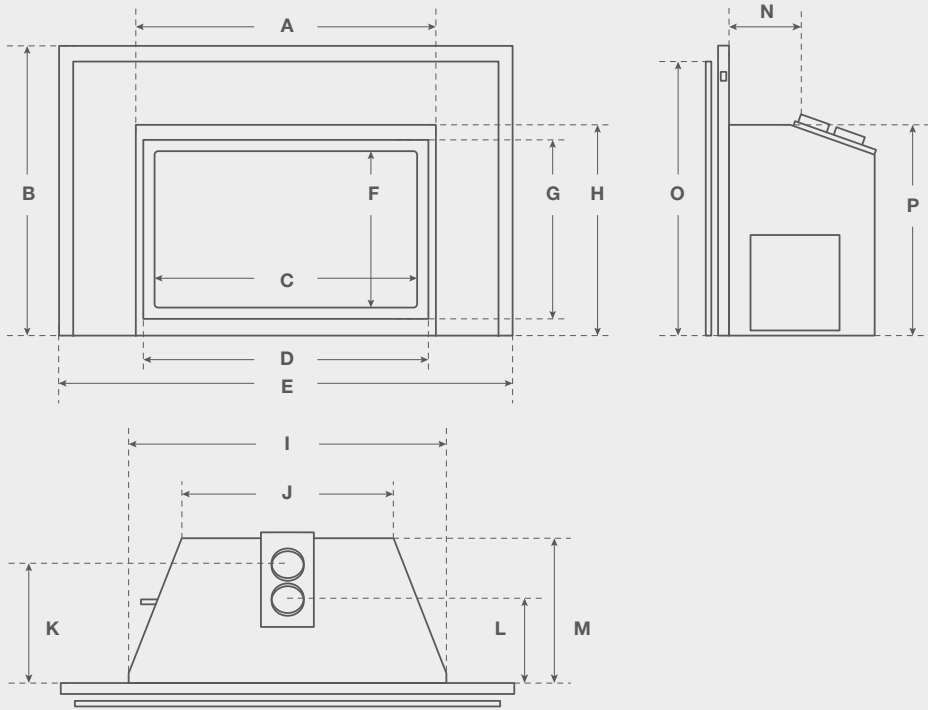

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
30FID	27 ³ / ₄	26 ⁷ / ₈	24 ¹ / ₄	26 ¹ / ₄	42	14 ¹ / ₄	16 ⁵ / ₈	19 ¹ / ₂	29 ¹ / ₂	19 ⁷ / ₈	11 ¹ / ₄	8	13 ¹ / ₂	6 ³ / ₄	25 ³ / ₈	20
34FID	31 ³ / ₄	31	28	38 ³ / ₈	46 ¹ / ₂	17 ¹ / ₂	20 ⁵ / ₈	23 ³ / ₈	33 ¹ / ₂	23 ³ / ₈	12 ³ / ₈	8 ⁵ / ₈	15	6 ³ / ₄	29 ¹ / ₂	23 ³ / ₄



MONTIGO / ILLUME / 34FID / CONTEMPORARY



MONTIGO / ILLUME / 30FID / CONTEMPORARY



REMOTE[^]
RXM5010



WALL REMOTE
EC1550



WIFI PHONE APP
CONTROL
SIT-WIFI



BLACK PORCELAIN[^]
PPL**

[^] Standard on
contemporary inserts

Unit Specifications

ICON LEGEND

AVAILABLE

+

NOT AVAILABLE

-

DEDICATED

◊

STANDARD

◦

	BTU	GAS SUPPLY PRESS. (SHOWN IN W.C.)	VENTING	FRONT VIEWING AREA	FRONT GLASS TYPE	STANDARD MEDIA	POWERVENT	REMOTE CONTROL	FANS	UPLIGHTING	DOWNLIGHTING
30FIDN-L-F [NG]	24,000	7	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
30FIDL-L-F [PROPANE]	23,000	11	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
30FIDN-S-F [NG]	24,000	7	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦
30FIDL-S-F [PROPANE]	23,000	11	3"OUT 3"IN	24¼X 14¼	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦
34FIDN-L-F [NG]	31,000	7	4"OUT 3"IN	28¾X 18¾	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
34FIDL-L-F [PROPANE]	30,000	11	4"OUT 3"IN	28¾X 18¾	HIGH TEMPERATURE	NONE	-	◦	+	◦	-
34FIDN-S-F [NG]	31,000	7	4"OUT 3"IN	28¾X 18¾	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦
34FIDL-S-F [PROPANE]	30,000	11	4"OUT 3"IN	28¾X 18¾	HIGH TEMPERATURE	TRADITIONAL	-	◦	+	-	◦

ILLUME MASONRY CAVITY (MINIMUM)

	A	B	C	D	E
30FID	20	14	30	20	5
34FID	24	15	34	24	6

